

A high security interlocking system offering a secure and simple solution to the use of multi-point locks in timber French doors.

- ✓ Designed to meet PAS24 requirements when tested on appropriate frames from an approved UCAS test house
- ✓ **Handed**
- ✓ Twin high security forged hooks and deadbolt throw to 22mm for maximum security
- ✓ 45mm backset - slave and master, with a 16.2mm eurogroove face plate
- ✓ Fully boxed adjustable shootbolt keeps to prevent timber erosion
- ✓ Slave lock cannot be activated whilst master lock is engaged
- ✓ Tested to withstand hurricane conditions
- ✓ Bi-Directional gearbox
- ✓ Stainless Steel face plate and drive rods
- ✓ Endurance tested in excess of 50,000 cycles
- ✓ BS EN 1670:2007 Grade 4 Corrosion Resistance




10
YEARS

PAS
24




240
HOURS


OVERALL DIMENSIONS

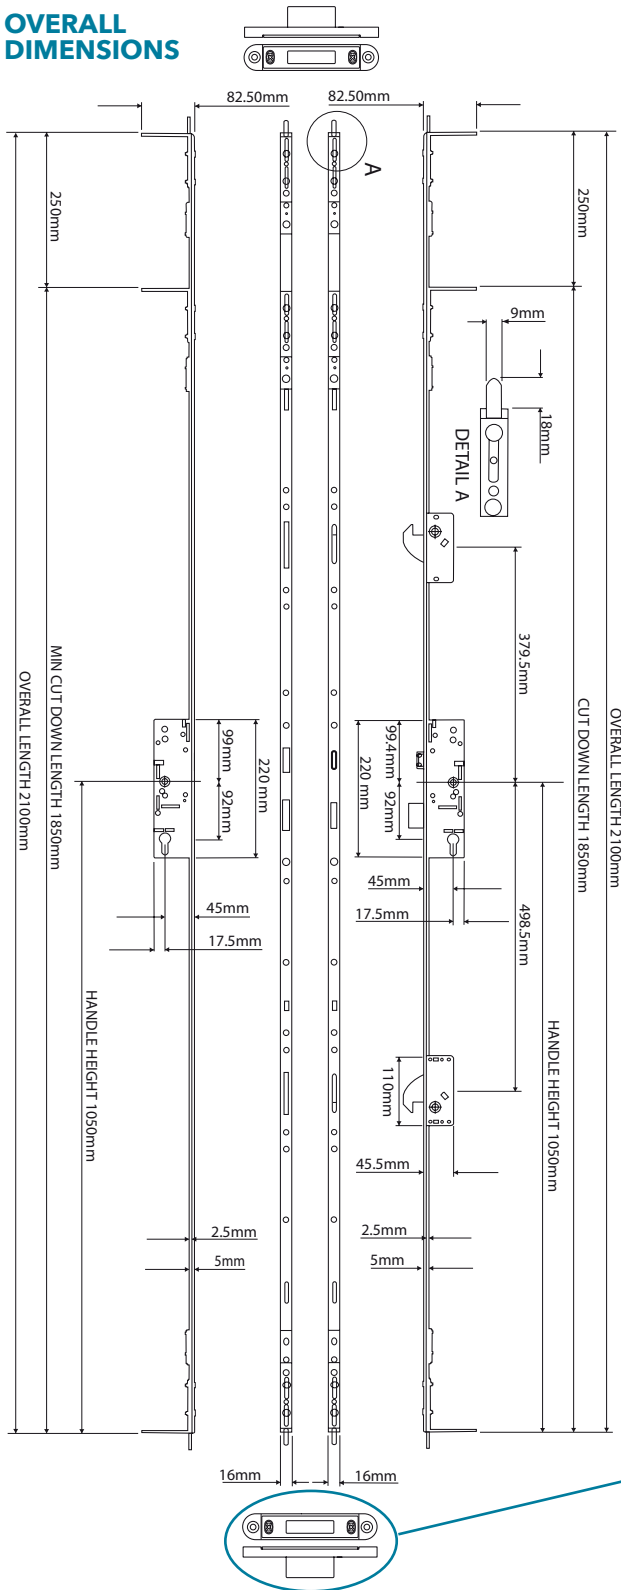

FITTING ARRANGEMENT

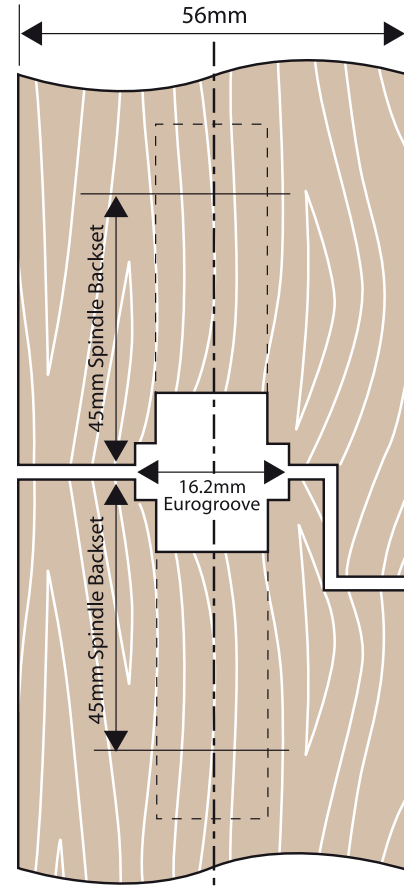

KEEP DIMENSIONS

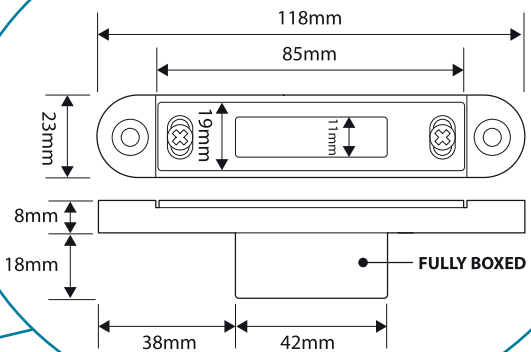

It is the responsibility of the door/window manufacturer to ensure that the finished product meets and required safety and performance specifications. Westward reserve the right to change the design and specification of any item herein without notice. All photographs are a representation only and do not form any part of the contract. All measurements are in millimetres (unless otherwise stated) are approximate and do not form any part of the contract. Colours shown within this information sheet are as accurate as the printing process will allow. For exact colour samples please contact our Sales Team. **E&OE.**