



TORNADO

DOOR LOCKS

ERA
EVERYWHERE





35mm Backset Gearbox shown



Tornado 2 Hook Door Lock

- ✓ Twin high security forged brass hook and central brass deadbolt throw 22mm to prevent unauthorised entry
- ✓ Designed to meet PAS24 requirements
- ✓ Available as 35 or 45mm backsets with 16mm face
- ✓ **Non-handed** locking mechanism, reversible centre latch
- ✓ Snib facility as standard on all locks
- ✓ Accepts standard 92mm handles and europrofile cylinders
- ✓ Split spindle for security door applications
- ✓ Bi-directional throw of locking features
- ✓ Stainless Steel face plate and drive rods

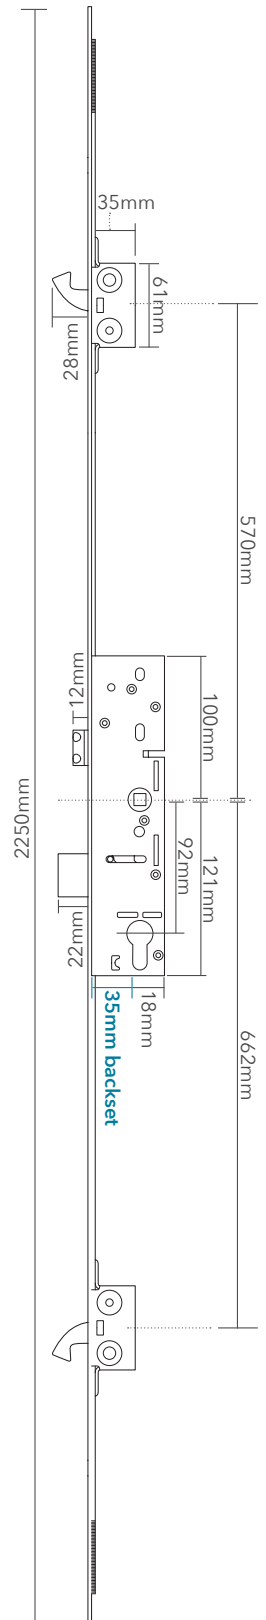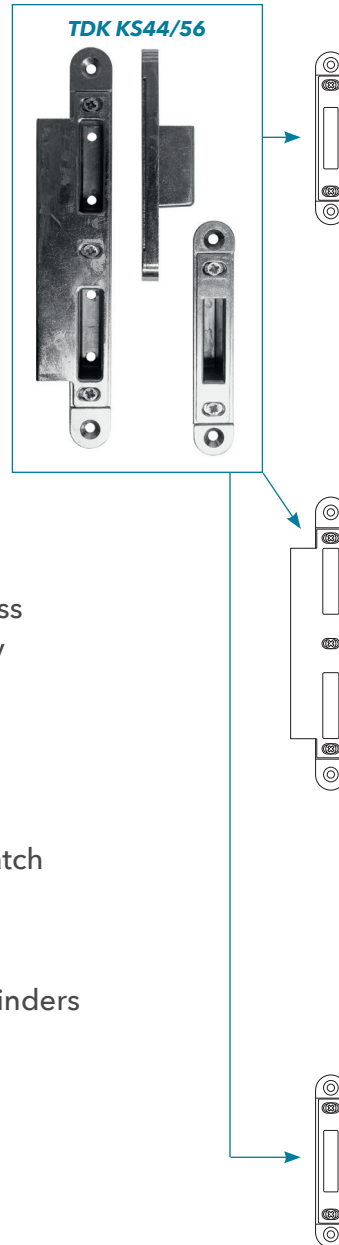

WESTWARD™



TORNADO


DOOR LOCKS

ERA
EVERYWHERE


FRENCH DOOR - SINGLE HANDLE OPTION

- ✓ At a spindle height of 1050mm the minimum door height is 1930mm including shootbolts, or 1700mm without top shootbolt
- ✓ At a spindle height of 950mm the minimum door height is 1830mm including shootbolts, or 1600mm without top shootbolt
- ✓ Max height 2.1m with shootbolts, TDKACEX must be used for taller doors
- ✓ Designed to meet PAS24 requirements when tested on appropriate frames from an approved UCAS test house

- 1 TDK KSSR
Single Shootbolt Keep
- 2 TDK KSST
Twin Shootbolt Keep
- 3 TDK ACSB
Shootbolt
- 4 TDK BH35/45
Master Bolt
- 5 TDK KS44/56 or TDK KSFR
Keep Set
- 6 KEEPS

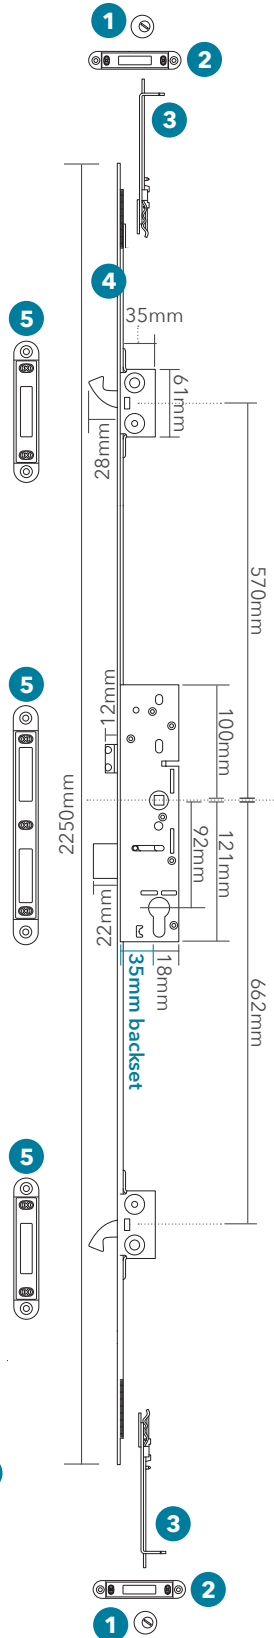


35mm Backset
Gearbox shown



FRENCH DOOR - TWIN HANDLE OPTION

**NON-INTERLOCKING -
MIN. WIDTH 57MM TO AVOID
USE OF FLOATING MULLION**

- 1 TDK KSSR
Single Shootbolt Keep
- 2 TDKACEX
Extension
- 3 TDK ACSB
Shootbolt
- 4 TDK BH35/45
Master Bolt
- 5 TDK KS44/56 or
TDK KSFR
Keep Set
- 6 TDK BF35/45
Slave Bolt

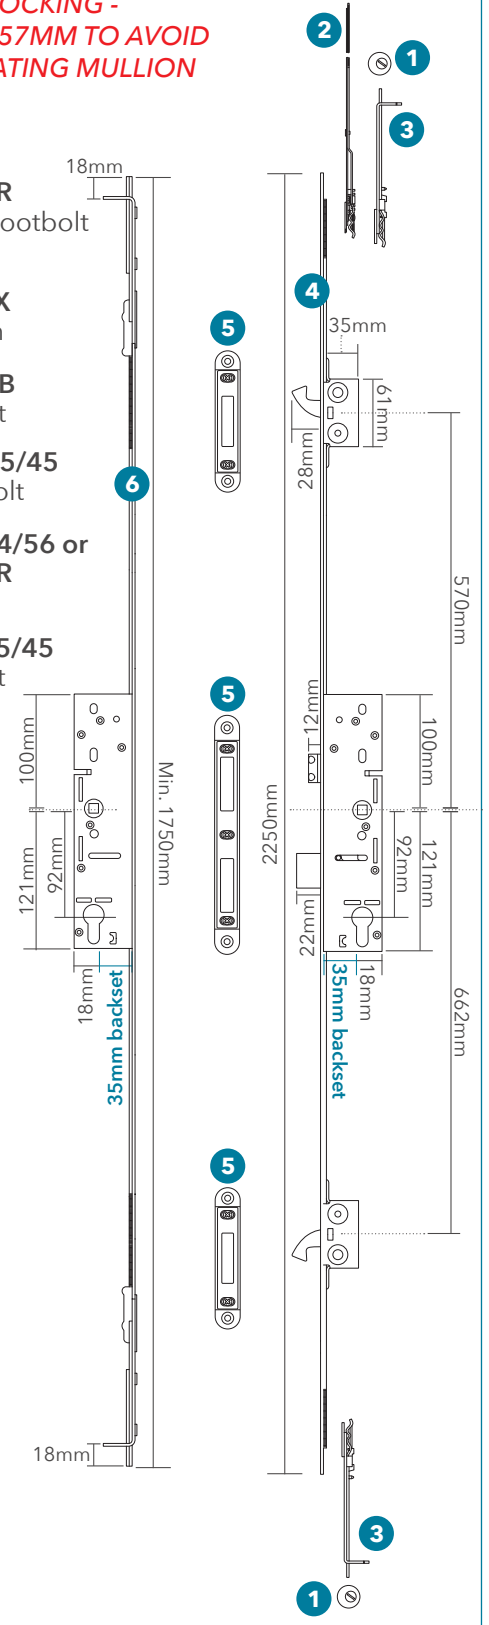

35mm Backset Gearbox shown

WESTWARD™